

Automatic
BATTERY
CHARGEUR
with
microprocess

6 - 12 - 24 V

BATIUM 7-24



The *Batium* range controlled by *microprocessor* guarantees you the maximum effectiveness and security.



15 ▶ 130 Ah
GEL/AGM/VRLA/LIQUIDE



The charge is **automatic/without supervision**.

50% shorter charge time compared to a traditional charger. Batium ensures an ultra-quick and safe charge, by providing a **constant average current** during "boost" phase.

Ref. **024502**



Ref. **024625**

Batium ensures a **100% charge** of all lead-acid batteries* (IwUoU curve). A standard "automatic" charger, W2 or WU curve, charges up to 90% only.

Batium is a microprocessor controlled **smart charger**, that constantly analyses the state of the battery and regulates the charge according to the battery's needs.

Deeply discharged batteries that are still in a good state of health (eg : Lights on when the vehicle is stopped) could have a voltage as low as 1V. Batium can **charge from 2 volt**, whereas most chargers cannot.

Protection of the on-board electronics. No need to disconnect the battery from the vehicle. No risk of sparks or short-circuits, and no current is supplied to the clamps unless they are connected to the battery terminals.

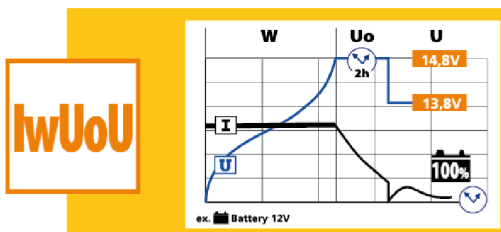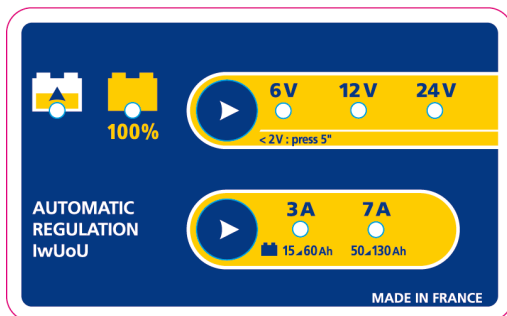

CE EN 60335-2-29

50/60Hz	210W	6-12-24 V	2	EFFICACE /RMS 11A	MOYEN/AVERAGE Reg 1 Reg 2 Reg 3	15A	21x34x13 cm	5,7 kg	-
230V	210W	6-12-24 V	2	11A	3A 7A -	15A	21x34x13 cm	5,7 kg	-

19/08/14

MADE in FRANCE

www.gys.fr